




Since 1947

Hydraulically Operated ASPHALT TACK TANK

Take it along for patches that stick!

It's what you want if you're responsible for getting the right kind of equipment to the job. Tac-King is compact and light-weight, extremely durable and virtually maintenance free. It does the tough jobs with precision control.

Big capacity!
Long reach!

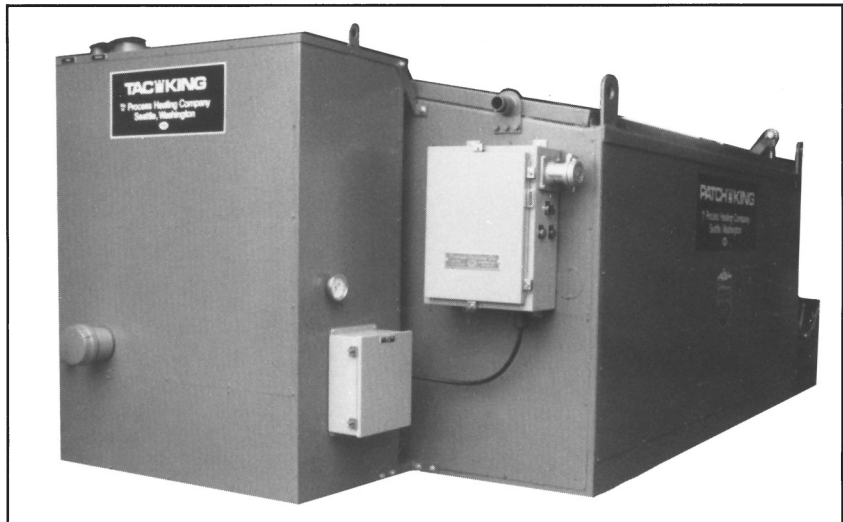

The two-compartment tank supplies 100 gallons of tack materials and 20 gallons of diesel for cleanup. A 30-foot hose gives the reach you need, and PHCo's demand start wand control gives instant and precise control.

Perfect companion to your Patch-King.

Take Tac-King along for patches that stick to the job. It's the perfect companion to your Patch-King unit. Just bolt it on or, if you'd rather, just slip it into the bed of your truck for tacking or crack filling.



Electrically heated!
Hydraulically powered!

PHCo prides itself in knowing that their quality products must meet or exceed standards set by the industry. Safety, reliability, durability, ease of automation and low maintenance requirements are what give PHCo's system the competitive edge.

SPECIFICATIONS

Tac-King model TK-120H

Electrical: PHCo's "Lo-Density" heating 240 V, single phase, 2 kW, 8.3 amp
480 V, single phase, 2 kW, 4.2 amp

Control: PHCo automatic Nema 12 control panel (weatherproof)
Houses non-indicating controlling thermostat

Power connection: weatherproof plug with 16/3 cord.

Motor: 3-hp hydraulically driven

Pump: 3-gpm, 100-lb. maximum pressure

Control: demand start valve on wand handle

Spray wand: 4' with handle, control valve and atomizing nozzle

Tank: 100-gal. tack material
20-gal. diesel for flushing pump and lines

Standard dimensions: 45" long × 20" wide × 56" high
Custom built for special applications

Weight: 600-lbs. dry



Process Heating Company

P.O. Box 84585

Seattle, WA 98124

Phone: 1-206-682-3414

Fax: 1-206-682-1582

E-mail: inquire@processheating.com

Web site: www.processheating.com

